

1124 1-1/2" Wide General Purposes Caster Series



PU (Red round) Wheel Diameter × Wheel Width 200 × 50mm


EAN

YJ-11240800334113

Center Brake Locking system. Top Plate Riveted and Stamping 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing. Zine-Plated, Top Plate (4.5T) Mounting Type system. Cast Iron Wheel Center with High Quality Polyurethane tread. Red Cast Iron finish, Bearing with Ball Bearing.

Wheel tread: Made of high-quality polyurethane  
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

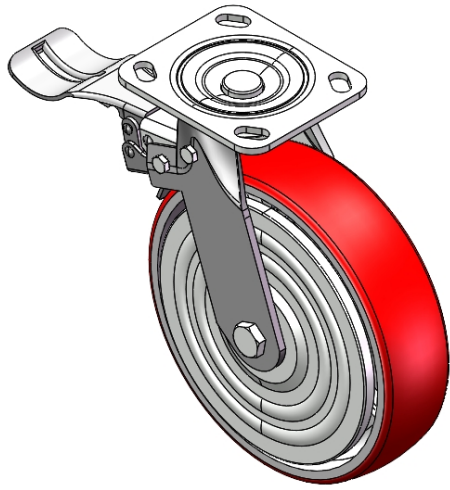

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                               |
| Wheel Diameter                                                         | 200mm                         |
| Wheel Width                                                            | 50mm                          |
| Wheel Bearing                                                          | Wheels With Ball Bearings     |
| Plate Size                                                             | 115 x 100mm                   |
| Bolt Hole Spacing                                                      | 85 x 70mm                     |
| Plate Hole                                                             | 20 x 11mm                     |
| Offset                                                                 | 45mm                          |
| Swivel Interference                                                    | 334mm                         |
| Overall Height                                                         | 240mm                         |
| Swivel Radius                                                          | 167mm                         |
| Hardness Of Tread                                                      | 93±5° Shore A                 |
| Load Capacity (Dynamic)                                                | 400kgs                        |
| Load Capacity (Static)                                                 | 600kgs                        |
| Temperature                                                            | -20°C to +70°C                |
| Fork Type                                                              | Swivel Caster With Rear Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 5.04kgs                       |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

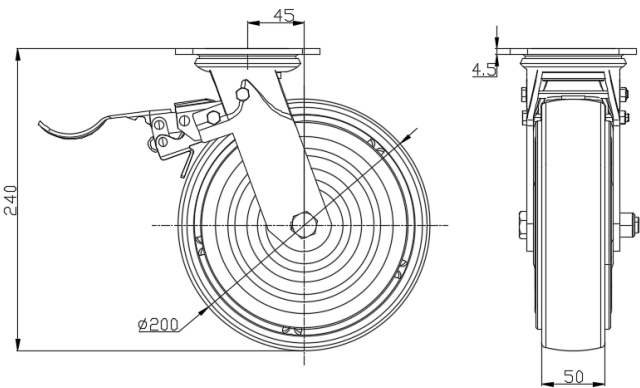

Mounting

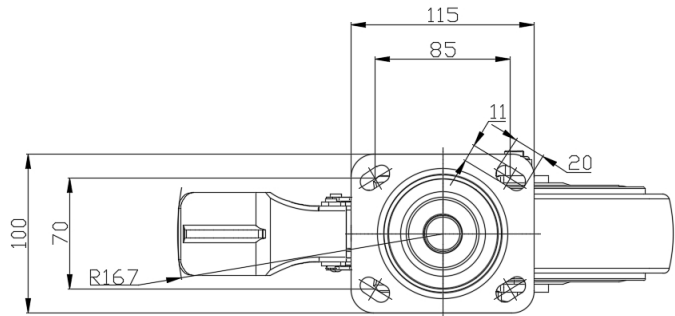

\* For any deviation between metric and imperial spec, please refer to the metric spec.