



1124 1-1/2" Wide General Purposes Caster Series

Flat Free Tire Wheel Diameter x Wheel Width 208 x53.5 mm

D


YJ-11240800434023

Side (wheel) brake Caster with Locking system. Top Plate Riveted and Stamping D-shaped Fork. Hole Zinc-Plated, Top Plate (4.5T) Mounting Type system Q235 Wheel Hub with High-Quality Resilient Rubber tread Black, Bearing with Chrome steel Ball bearing.

Wheel surface: high-quality elastic rubber

Wheel Center: iron core

Drawings are for reference only and may differ from the product

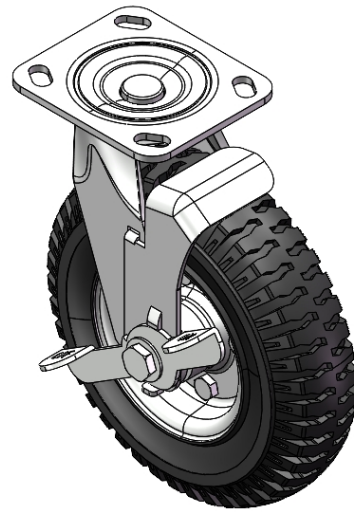

Picture may differ from original product

Technical Data


☒ Imperial ☐ Metric

Wheel Diameter	208mm
Wheel Width	53.5mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	4-9/16 " x 4 "
Bolt Hole Spacing	3-3/8 " x 2-3/4 "
Plate Hole	13/16 " x 3/8 "
Offset	1-13/16 "
Swivel Interference	11-3/4 "
Overall Height	9-5/8 "
Swivel Radius	5-15/16 "
Hardness Of Tread	82±5° Shore D
Load Capacity (Dynamic)	331lbs
Load Capacity (Static)	496lbs
Temperature	-13°F to +176°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	9.0lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

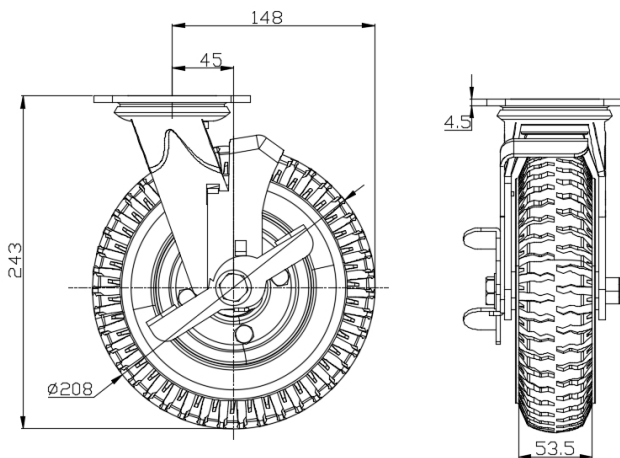

Mounting

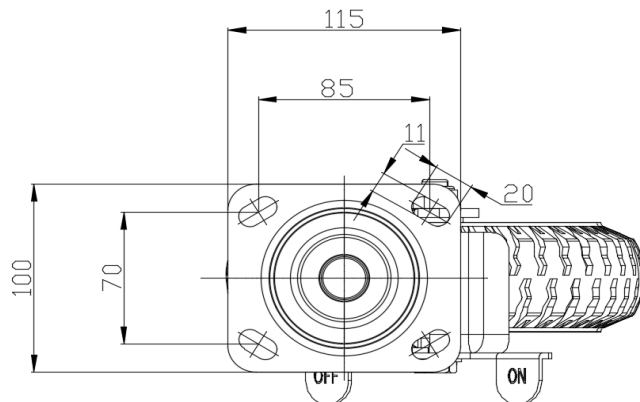

* For any deviation between metric and imperial spec, please refer to the metric spec.