1124 1-1/2" Wide General Purposes Caster Series



CPD (White) Wheel Diameter × Wheel Width 200 x 50mm

EAN

YJ-11240800444013

Center Brake Locking system. Top Plate Riveted and Stamping 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing. Zine-Plated, Top Plate (4.5T) Mounting Type system. Reinforced Polypropylene and tread. Transparent, Bearing—Ball Bearing, with special anti-tangle wheel covers.

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 8 "
Wheel Width 2 "

Wheel Bearing Wheels With Ball Bearings

4-9/16 " x 4 " Plate Size **Bolt Hole Spacing** 3-3/8 " x 2-3/4 " 13/16 " x 3/8 " Plate Hole 1-13/16" Offset 13-5/16" Swivel Interference 9-1/2 " Overall Height 6-5/8 " **Swivel Radius** Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature 4°F to +140°F

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 7.0lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

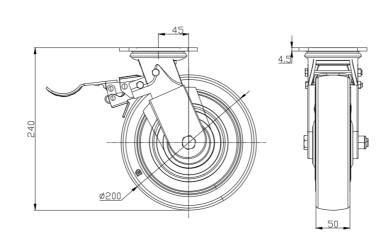

Mounting

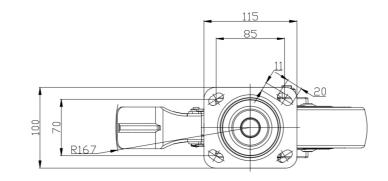

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.