1124 1-1/2" Wide General Purposes Caster Series



Resolute Rubber(Gray, Round) Wheel Diameter × Wheel Width 202 × 50mm

EAN

YJ-11240800451013

Rigid Caster, Welded Caster Fork 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Zine-Plated, Top Plate (4.5T) Mounting Type mechanism High-quality Impact Resistance Polypropylene Wheel Center with High-Quality Thermoplastic Rubber (TPR) tread Pearl-finish dark gray, Bearing with Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

ic

8 " Wheel Diameter

Wheel Bearing Wheels With Ball Bearings

4-9/16 " x 4 " Plate Size 3-3/8 " x 2-3/4 " Bolt Hole Spacing 13/16 " x 3/8 " Plate Hole 9-1/2 " Overall Height 72±5° Shore A Hardness Of Tread

Load Capacity (Dynamic) 397lbs Load Capacity (Static) 595lbs -4°F to +140°F Temperature Rigid Caster N/A N/A N/A


Fork Type Stainless **Electrical Conductivity** Anti-Static Weight 4.7lbs Standard ISO22883

Advantages at a glance


Rolling Resistance **Operating Noise**

Floor Surface Preservation • • • • •

Dimensions

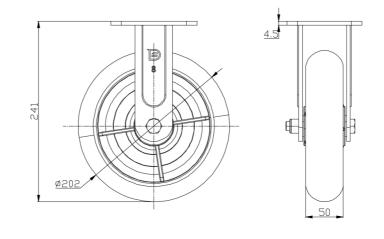

Mounting

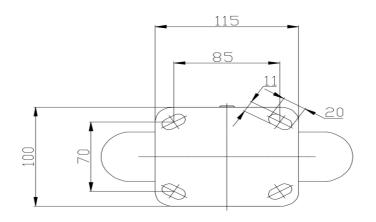

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.