1124 1-1/2" Wide General Purposes Caster Series



AQPU (brown flat) Wheel Diameter × Wheel Width 200 x 50mm


YJ-11240800601033

Rigid Caster, Welded Caster Fork with 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing cutout Zine-Plated, Top Plate (4.5T) Mounting Type system Aluminum core, High Quality Polyurethane tread Brown color, Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: aluminum core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Metric O Impe	rial
---------------	------

Wheel Diameter 200mm
Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Overall Height 240mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 400kgs
Load Capacity (Static) 600kgs

Load Capacity (Static) 600kgs

Temperature -20°C to +70°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.85kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


• • • • •

Floor Surface Preservation • • • • •

Dimensions



Mounting

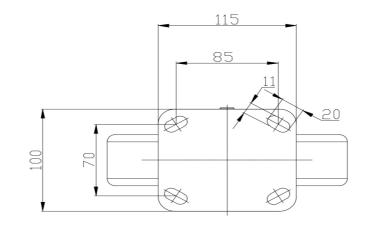

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.