1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 27mm

EAN


YJ-11290300265013

Swivel Caster with Riveted Stamping Fork—3/8"-16"
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Pearl-gray finish, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 27mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 3/8"-16

Threaded Size 32mm

Offset 29mm

Swivel Interference 134mm

Overall Height 106mm

Swivel Radius 67mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

0.34kgs

Standard

ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \circ

Operating Noise


• • • 0

Floor Surface Preservation $\bullet \bullet \bullet \bullet \bullet$

Dimensions

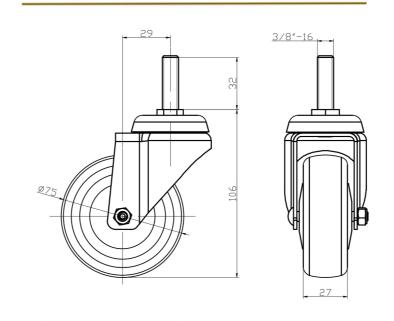

Mounting

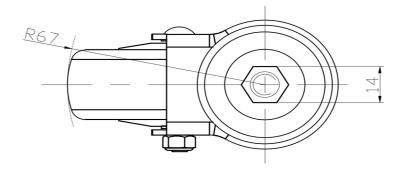

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.