## 1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 27mm

EAN


### YJ-11290300265013

Swivel Caster with Riveted Stamping Fork—3/8"-16"
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Pearl-gray finish, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

	mperial	$\bigcirc$	Metric
--	---------	------------	--------

Wheel Diameter 3 "

Wheel Width 1-1/16 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 3/8"-16 1-5/16 " Threaded Size 1-3/16 " Offset 5-3/8 " **Swivel Interference** 4-1/4 " Overall Height 2-11/16 " Swivel Radius Hardness Of Tread 82±5° Shore A Load Capacity (Dynamic) 154lbs

Load Capacity (Dynamic) 154lbs

Load Capacity (Static) 231lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.7lbs

ISO22883

Standard


### Advantages at a glance

Rolling Resistance


 $\bullet$   $\bullet$   $\circ$ 

Floor Surface Preservation  $\bullet \bullet \bullet \bullet \bullet$ 

### Dimensions

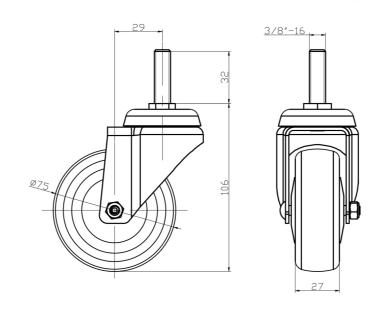

# Mounting

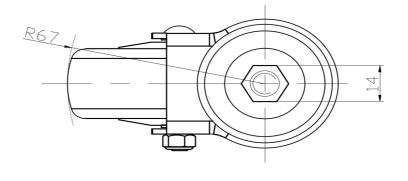

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.