1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 27mm

EAN


YJ-11290300265613

Swivel Caster, thread-Riveted Stamping Fork—M10-P1.5 Extended control lever surface, Mounting Type - Threaded Stem device + dust ring High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-colored dark gray, Bearing—Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 27mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M10-P1.5

Threaded Size 25mm

Offset 29mm

Swivel Interference 134mm

Overall Height 106mm

Swivel Radius 67mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +60°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.35kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \circ


Operating Noise

• • • 0


Floor Surface Preservation • • • • •

Dimensions





Mounting

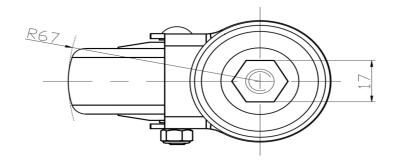

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.