1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 27mm

EAN

YJ-11290300266273

Casters with a Total Brake and With locking system. Threaded Stem Riveted Pressed Fork **—**3/8"-16"


Zine-Plated, Mounting Type - Threaded Stem High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced

Polypropylene Rubber (TPR) Wheel Tread Pearl-gray finish, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm Wheel Width 27mm

Wheels With Ball Bearings Wheel Bearing

3/8"-16 **Threaded Stem** Threaded Size 25mm Offset 29mm Swivel Interference 134mm Overall Height 106mm **Swivel Radius** 67mm

Hardness Of Tread 82±5° Shore A

70kgs Load Capacity (Dynamic) 105kgs Load Capacity (Static)

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.40kgs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

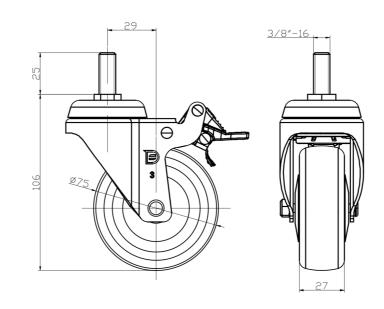

Mounting

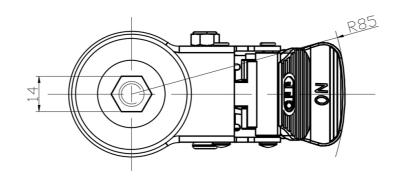

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.