1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 27mm

EAN

YJ-11290300266273

Casters with a Total Brake and With locking system. Threaded Stem Riveted Pressed Fork **—**3/8"-16"


Zine-Plated, Mounting Type - Threaded Stem High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Pearl-gray finish, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

● Imperial ○ Metric

3 " Wheel Diameter

Wheel Bearing Wheels With Ball Bearings

1-1/16 "

3/8"-16 Threaded Stem 1" Threaded Size 1-3/16 " Offset 5-3/8 " Swivel Interference Overall Height 4-1/4 " 2-11/16 " **Swivel Radius** Hardness Of Tread 82±5° Shore A

154lbs Load Capacity (Dynamic) Load Capacity (Static) 231lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake Stainless N/A

Electrical Conductivity N/A Anti-Static N/A Weight 0.9lbs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

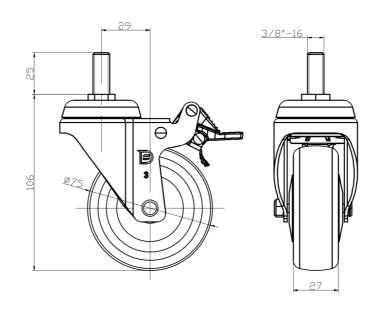

Mounting

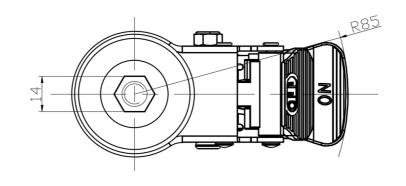

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.