

1129 Series

PPR wheel(Pearlescent dark gray) wheel diameter × wheel width 75 x 27mm


EAN

YJ-11290300266433

Castors with double brake and locking system. Threaded stamped feet - M12- P1.75
Surface zinc-plated, threaded mounting
Impact-resistant polypropylene wheel core, thermoplastic elastomer (TPR) wheel tread
Pearl-finish dark grey, wheel bearings - precision ball.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel core: Made of high-quality impact-resistant polypropylene

Product descriptions are for reference only. The actual product shall prevail.

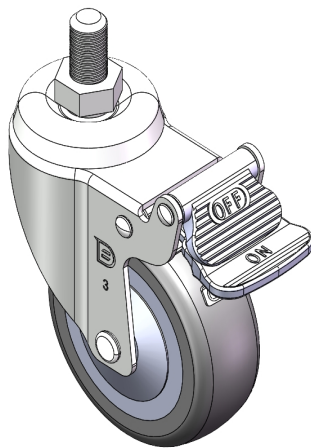

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	75mm
Wheel Width	27mm
Wheel Bearing	wheel equipped with ball bearings
Thread Specifications	M12-P1.75
thread length	20mm
Offset	29mm
Swivel Interference	170mm
Overall height	109mm
Swivel Radius	85mm
Hardness of tread	82±5° Shore A
Load capacity (dynamic)	70kgs
Load capacity (static)	105kgs
Temperature	-20°C to +60°C
Stand Style	Double Elimination
Stainless steel	N/A
Conductive	N/A
Anti	N/A
Weight	0.40kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

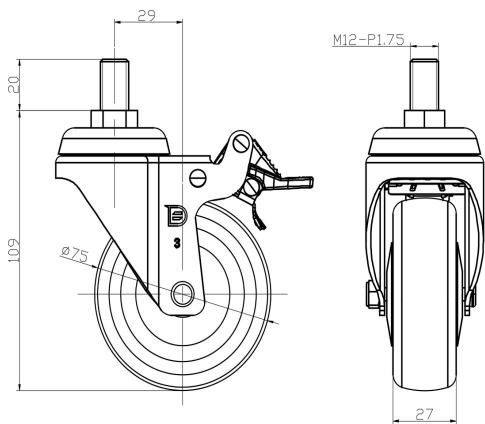

Mounting

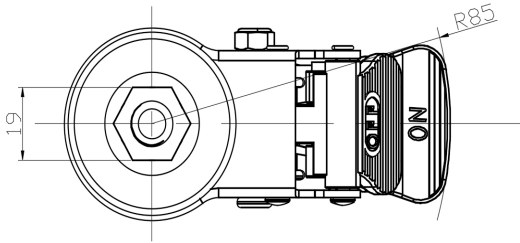

Drawings are for reference only and may differ from the product

* For any deviation between metric and imperial spec, please refer to the metric spec.