# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR E-Conductive (black-gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


#### YJ-11290400172013

Swivel Caster with Riveted Fork and Stamping bracket – medical holes
Zine-Plated, Mounting Type - Top Plate
High-Quality Impact-Resistant Polypropylene core with High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Black-gray color, Bearing – Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

### ● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 95 x 72.5mm

Bolt Hole Spacing 72.2 x 53.5mm

Plate Hole 10mm

Offset 43.4mm

Swivel Interference 188mm

Overall Height 137mm

Swivel Radius 94mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 100kgs
Load Capacity (Static) 150kgs

Temperature -20°C to +60°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity Y 电阻值10^3~10^4

Anti-Static N/A
Weight 0.82kgs
Standard ISO22883

### Advantages at a glance

Rolling Resistance


• • • • 0

**Operating Noise** 


• • • • 0

Floor Surface Preservation • • • • •

#### **Dimensions**

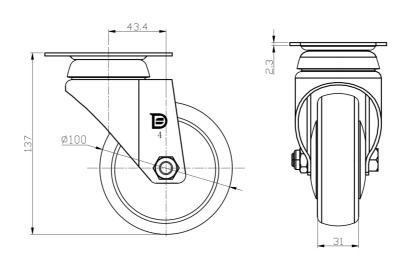

## Mounting

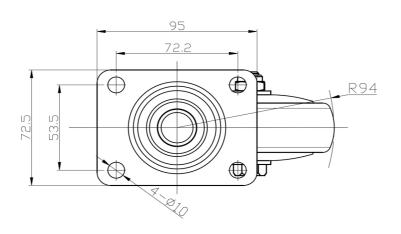

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.