1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-11290400265093

Swivel Caster with Riveted Stamping Fork—3/8"-16"
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread Pearl-gray finish, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Load Capacity (Static)

4 " Wheel Diameter

1-1/4 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 3/8"-16 1" Threaded Size Offset 1-3/4 " 7-1/2 " **Swivel Interference** 5-1/2 " Overall Height 3-3/4 " Swivel Radius

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 220lbs 331lbs

Temperature -4°F to +140°F Fork Type **Swivel Caster**

N/A Stainless **Electrical Conductivity** N/A Anti-Static N/A Weight 1.5lbs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

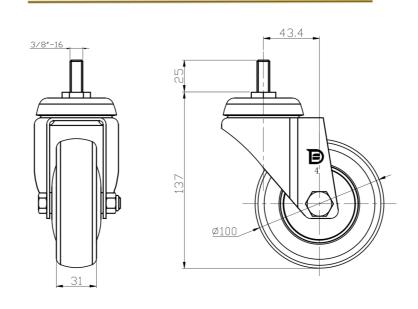

Mounting

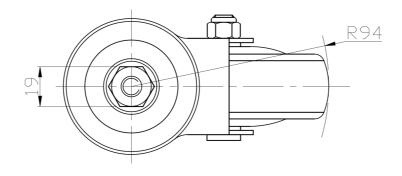

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.