1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN

YJ-11290400266463

Castors with Total Brake Locking system. Thread-Riveted Stamping Fork - M16-P2 Surface Zine-Plated, Mounting Type - Threaded Stem + thread protector High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-colored dark gray, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M16-P2
Threaded Size 30mm
Offset 43.4mm
Swivel Interference 220mm
Overall Height 137mm
Swivel Radius 110mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 100kgs
Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.85kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \circ

Operating Noise


 \bullet \bullet \circ

Floor Surface Preservation • • • • •

Dimensions

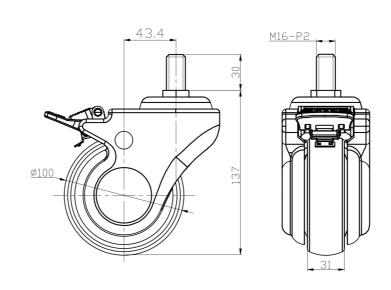

Mounting

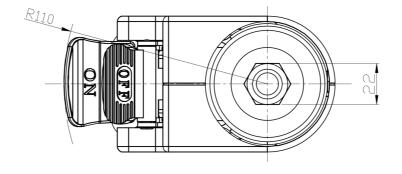

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.