1129 Medical Caster Series



NPPR(grey tire) Wheel Diameter × Wheel Width 100 x 23mm

EAN

YJ-11290400266933

Casters with a Total Brake and With locking system. Threaded Stem, Riveted, Stamping Fork—1/2"-12"


Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread (Wheel Tread protected with heat shrink film)

Gray-green color, Plain Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 23mm

Wheel Bearing Wheel With Plain Bearing

1/2 " -12 **Threaded Stem** Threaded Size 27.5mm Offset 43.4mm 220mm Swivel Interference 136mm Overall Height **Swivel Radius** 110mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 70kgs 105kgs Load Capacity (Static)

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.69kgs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

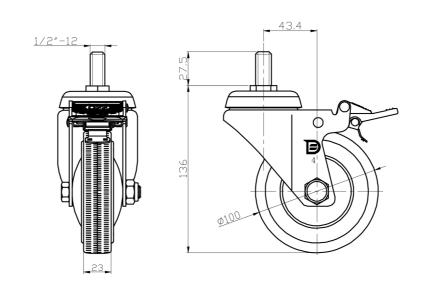

Mounting

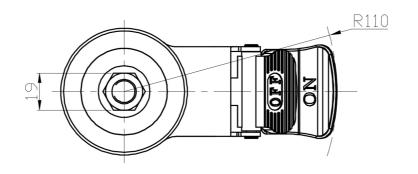

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.