# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


#### YJ-11290400266A23

Rigid castor with brake, thread-Riveted Stamping Fork—M12-P1.75 Extended control lever surface, Mounting Type - Threaded Stem device + thread protector High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-colored dark gray, Bearing—Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 29mm

Overall Height 137mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 100kgs

Load Capacity (Static) 150kgs

Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Directional Lock

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.80kgs

Standard ISO22883


## Advantages at a glance


Rolling Resistance • • • •

Operating Noise • • • •


Floor Surface Preservation • • • • •

### **Dimensions**





# Mounting

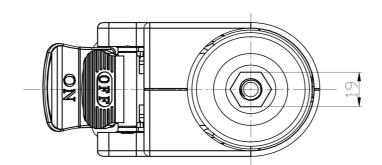

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.