1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-11290400266A23

Rigid castor with brake, thread-Riveted Stamping Fork—M12-P1.75 Extended control lever surface, Mounting Type - Threaded Stem device + thread protector High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-colored dark gray, Bearing—Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter

4 "

Wheel Width

1-1/4 "

Wheel Bearing

Wheels With Ball Bearings

Threaded Stem
Threaded Size

M12-P1.75 1-3/16 "

Tilleaded Size

5-1/2 "

Overall Height

5-1/2 "

Hardness Of Tread

 $82 {\pm} 5^{\circ}$ Shore A

Load Capacity (Dynamic)

Load Capacity (Static)

220lbs

331lbs

Temperature

-4°F to +140°F

Fork Type

Swivel Caster With Directional Lock

Stainless
Electrical Conductivity

N/A N/A

Anti-Static

N/A

Weight

1.8lbs

Standard

ISO22883

Advantages at a glance

Rolling Resistance


• • • 0


Operating Noise

 \bullet \bullet \circ


Floor Surface Preservation $\bullet \bullet \bullet \bullet \bullet$

Dimensions





Mounting

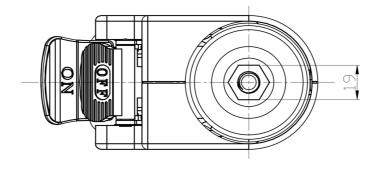

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.