1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-11290400266A33

Casters with Total Brake Locking system. Threaded Stamping Fork - M12-P1.75 Extended control lever surface, Mounting Type - Threaded Stem device High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread (Wheel Tread added with thermoplastic shrink film protection) Pearl dark gray, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75 Threaded Size 29mm Offset 43.4mm **Swivel Interference** 218mm Overall Height 137mm **Swivel Radius** 109mm Hardness Of Tread

82±5° Shore A

Load Capacity (Dynamic) 100kgs Load Capacity (Static) 150kgs

-20°C to +60°C Temperature

Fork Type Swivel Caster With Total Brake

N/A Stainless **Electrical Conductivity** N/A Anti-Static N/A Weight 0.80kgs ISO22883 Standard


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

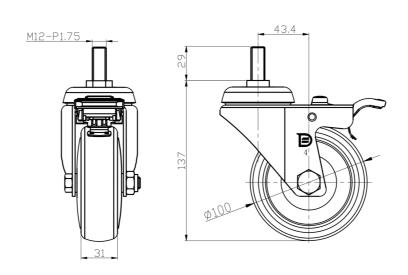

Mounting

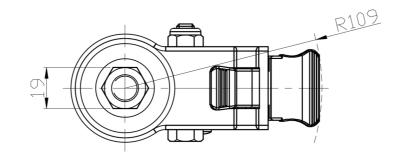

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.