1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray small cap) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-11290400267073

Swivel castor, Riveted Stamping Fork - Ø28x30L Surface Zine-Plated, plug-in Mounting Type, M8 hole High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-finish dark grey, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Diameter 1-1/8 "

Stem Hole Spec 1-3/16 "

Offset 1-3/4 "

Swivel Interference 7-1/2 "

Overall Height 5-1/4 "

Swivel Radius 3-3/4 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature -4°F to +140°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.9lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \circ

Operating Noise


• • • • 0

Floor Surface Preservation $\bullet \bullet \bullet \bullet \bullet$

Dimensions

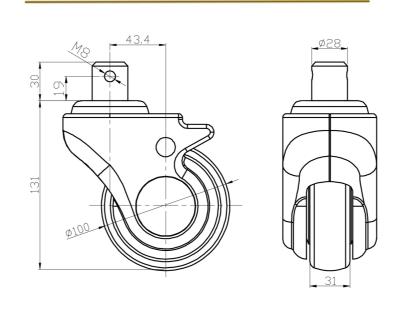

Mounting

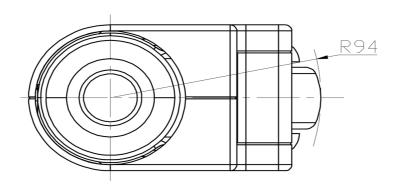

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.