1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-11290400268053

Castors with Total Brake Locking system. Single Bolthole Fork - 12.5 holes Surface Zine-Plated, Mounting Type - Single Bolthole Impact resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl grey, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Single Bolt HoleCentre Hole 12.5mm

Offset 43.4mm

Swivel Interference 220mm

Overall Height 132mm

Swivel Radius 110mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 100kgs
Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.71kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • 0

Operating Noise


 \bullet \bullet \bullet \circ

Floor Surface Preservation • • • • •

Dimensions

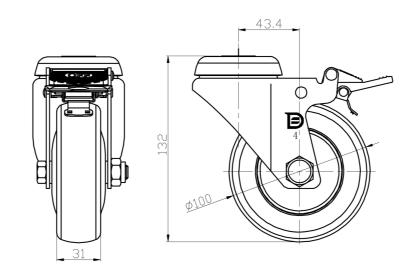

Mounting

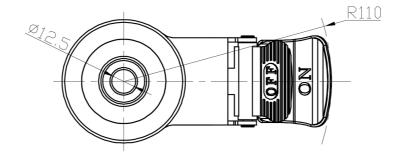

 $^{{}^{*}}$ For any deviation between metric and imperial spec, please refer to the metric spec.