1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-11290400268093

Castors with Total Brake Locking system. Stamped and Riveted feet - Ø28x30L Surface zinc-plated, stud Mounting Type, M8 hole High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-finish dark grey, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Diameter 28mm

Stem Hole Spec 30mm

Offset 43.4mm

Swivel Interference 220mm

Overall Height 131mm

Swivel Radius 110mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 100kgs
Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.87kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \bullet \circ

Operating Noise


• • • •

Floor Surface Preservation • • • • •

Dimensions

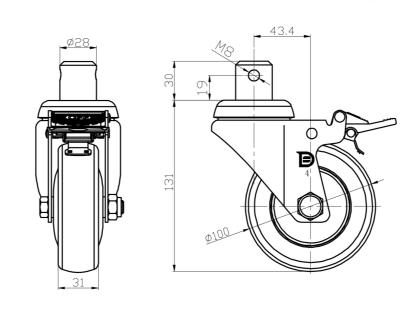

Mounting

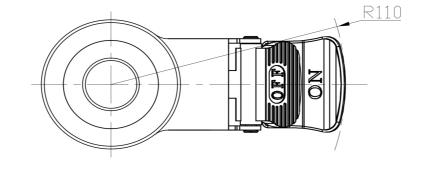

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.