# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray small cap) Wheel Diameter × Wheel Width 100 x 31mm

EAN


#### YJ-11290400268933

Castors with Total Brake Locking system. Stamped and Riveted feet - Ø28x40L Surface zinc-plated, stud-type Mounting Type, Ø8.5 hole High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-finish dark grey, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

	Imp	erial	$\bigcirc$	Metric
--	-----	-------	------------	--------

Wheel Diameter 4 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Diameter 1-1/8 "

Stem Hole Spec 1-5/8 "

Offset 1-3/4 "

Swivel Interference 8-3/4 "

Overall Height 5-1/4 "

Swivel Radius 4-3/8 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight2.2lbsStandardISO22883

## Advantages at a glance


Rolling Resistance


• • • 0

Operating Noise


Floor Surface Preservation  $\bullet \bullet \bullet \bullet \bullet$ 

### Dimensions





Mounting

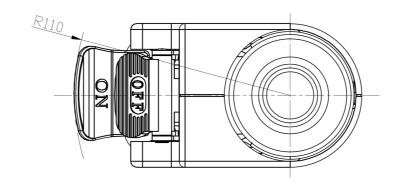

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.