1129 Medical Caster Series

Dersheng Casters Keep Rolling

Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 100 x 31mm

EAN


YJ-11290400455013

Swivel Caster with thread-Riveted Stamping Fork—M16-P2
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Pearl-finish dark gray, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

| • 1 | Metric | \bigcirc | Imperial |
|-----|--------|------------|----------|
|-----|--------|------------|----------|

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M16-P2
Threaded Size 30mm
Offset 43.4mm
Swivel Interference 188mm
Overall Height 137mm
Swivel Radius 94mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 125kgs

Load Capacity (Static) 187.5kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.74kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

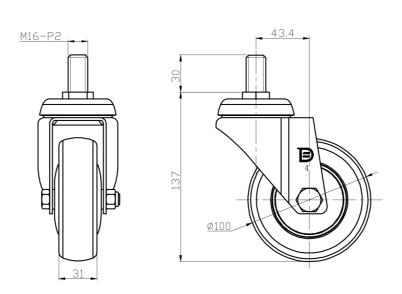

Mounting

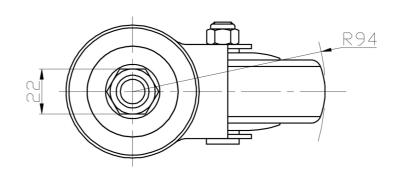

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.