



1129 Medical Caster Series

AQPU (brown round) Wheel Diameter × Wheel Width 100 x 31mm


EAN

YJ-11290400606193

Equipped with a 180° fixed brake Caster. UNC-Riveted Stamping foot—M16-P2
Zine-Plated, Mounting Type - Threaded Stem with thread protector
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread
Pearl-finish dark gray, Bearing—Ball Bearings.

Wheel tread: Made of high-quality polyurethane
Wheel Center: aluminum core

Drawings are for reference only and may differ from the product

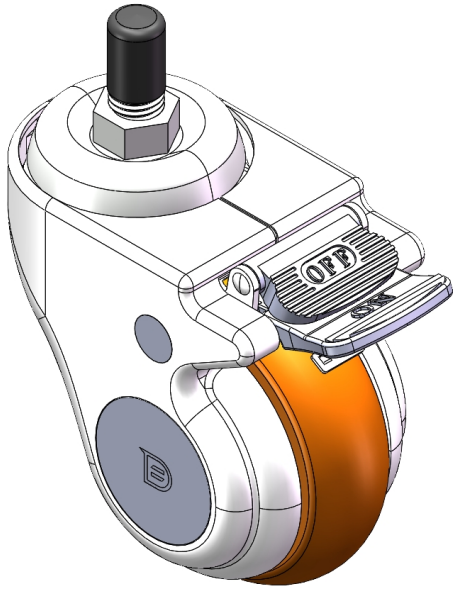

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	100mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M16-P2
Threaded Size	30mm
Offset	43.4mm
Swivel Interference	220mm
Overall Height	137mm
Swivel Radius	110mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	200kgs
Load Capacity (Static)	300kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Directional Lock
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.01kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

Dimensions

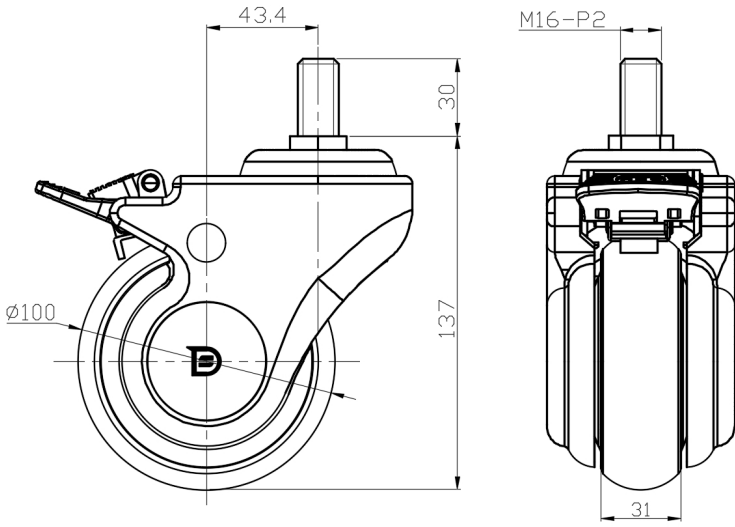

Mounting

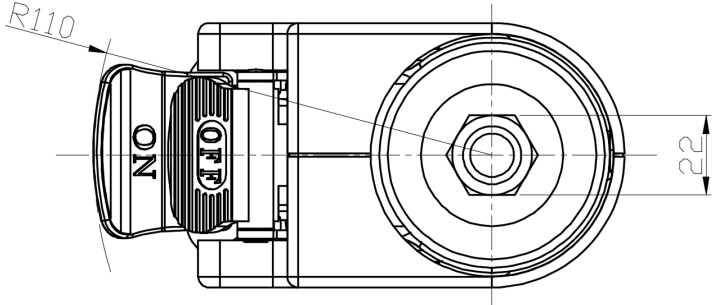

* For any deviation between metric and imperial spec, please refer to the metric spec.