1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR E-Conductive (black-gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN

YJ-11290500171013

Rigid Caster with Stamping Fabricated Caster Fork and medical holes.

Zine-Plated, Mounting Type - Top Plate.

High-Quality Impact-Resistant Polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Black-gray color. Bearings: Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 96 x 75mm

Bolt Hole Spacing 72.2 x 53.5mm

Plate Hole 10mm

Overall Height 162mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

Fork Type

Stainless

110kgs

165kgs

-20°C to +60°C

Rigid Caster

N/A

Electrical Conductivity Y 电阻值10^3~10^4

Anti-Static N/A
Weight 0.71kgs
Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \bullet \circ


Operating Noise

• • • 0


Floor Surface Preservation • • • • •

Dimensions





Mounting

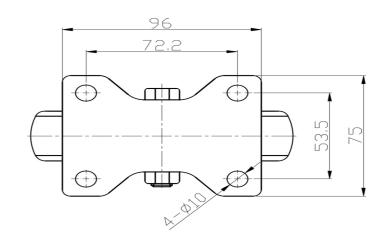

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.