1129 Medical Caster Series



PPR E-Conductive (black-gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN

YJ-11290500176013

Casters with a Total Brake and With locking system. Threaded Stem Riveted Pressed Fork --M12- P1.75

Zine-Plated, Mounting Type - Threaded Stem High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene

Rubber (TPR) Wheel Tread

Black-gray color, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

5" Wheel Diameter 1-1/4 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

M12-P1.75 **Threaded Stem** 1" Threaded Size 1-7/16 " Offset 8-3/4 " Swivel Interference Overall Height 6-1/2 " 4-3/8 " **Swivel Radius**

Hardness Of Tread 82±5° Shore A

243lbs Load Capacity (Dynamic) Load Capacity (Static) 364lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity Y 电阻值10^3~10^4

Anti-Static N/A Weight 2.1lbs ISO22883 Standard


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

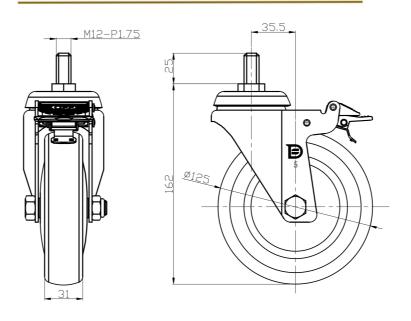

Mounting

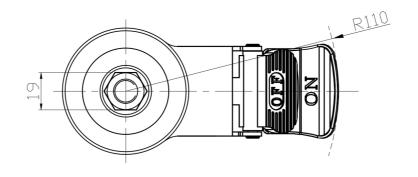

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.