1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-11290500266923

Casters with Total Brake Locking system. Thread-Riveted Stamping Fork—M12-P1.75 Extended control lever surface, Mounting Type - Threaded Stem device + Threaded Stem protective sleeve High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-colored dark gray, Bearing—Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 29mm

Offset 35.5mm

Swivel Interference 220mm

Overall Height 162mm

Swivel Radius 110mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 110kgs
Load Capacity (Static) 165kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.94kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

 $\bullet \bullet \bullet \circ$


Operating Noise • •

Floor Surface Preservation • • • • •

Dimensions

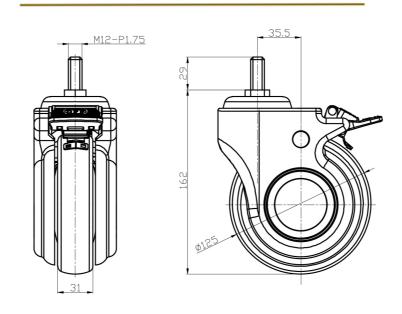

Mounting

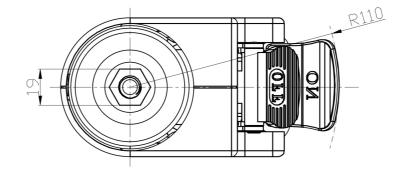

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.