1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-11290500266943

Casters with Total Brake Locking system. Threaded Stamping Fork - M16-P2 Extended control lever surface, Mounting Type - Threaded Stem High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread (Wheel Tread with added thermoplastic shrink film protection) Pearl-colored dark gray, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M16-P2 Threaded Size 30mm Offset 35.5mm **Swivel Interference** 218mm Overall Height 162mm **Swivel Radius** 109mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 110kgs Load Capacity (Static) 165kgs

-20°C to +60°C Temperature

Fork Type Swivel Caster With Total Brake

N/A Stainless **Electrical Conductivity** N/A Anti-Static N/A Weight 1.18kgs ISO22883 Standard


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

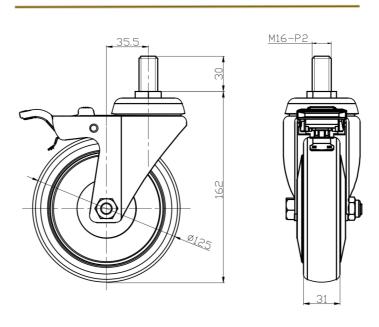

Mounting

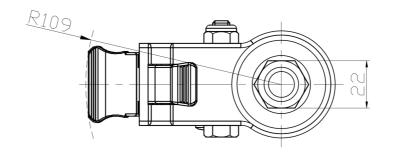

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.