1129 Medical Caster Series

Dersheng Casters Keep Rolling

EAN

x 31mm

YJ-11290500268483


Castors with Total Brake Locking system. Stamped and Riveted Fork - Ø28x28.5L Extended control lever surface, stud-type Mounting Type device, M8 hole + wave disc Decorative Plastic Cover High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-colored dark gray, Bearing - Ball Bearing.

Classic PPR wheel(Pearlescent dark gray small cap) Wheel Diameter × Wheel Width 125

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Diameter 28mm Stem Hole Spec 28.5mm Offset 35.5mm **Swivel Interference** 220mm 157.5mm Overall Height **Swivel Radius** 110mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 110kgs Load Capacity (Static) 165kgs

-20°C to +60°C Temperature

Fork Type Swivel Caster With Total Brake

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.19kgs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

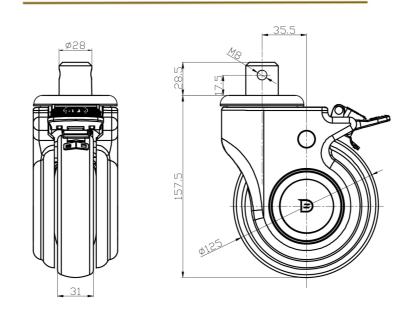

Mounting

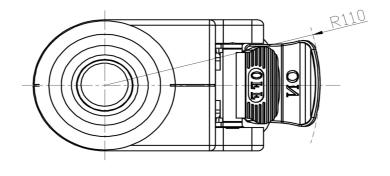

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.