

1138 38 Series Central Locking Caster Series

Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 100 x 31mm

EAN


YJ-11380400458020

Central locking with hexagonal cam control via long lever, Total Brake Casters.
 Single Bolthole assembly, Stamping Fork.
 Zinc-Plated surface, hollow Mounting Type device.
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.
 Pearl dark gray, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

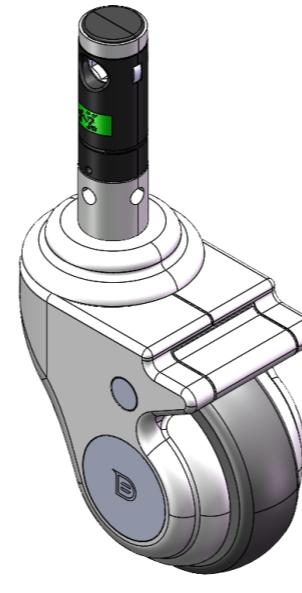

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 100mm

Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Stem Diameter 28mm

Stem Length 96mm

Offset 41mm

Swivel Interference 188mm

Overall Height 141mm

Swivel Radius 94mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.98kgs

Standard ISO22881


Advantages at a glance

Rolling Resistance • • • • ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

Dimensions

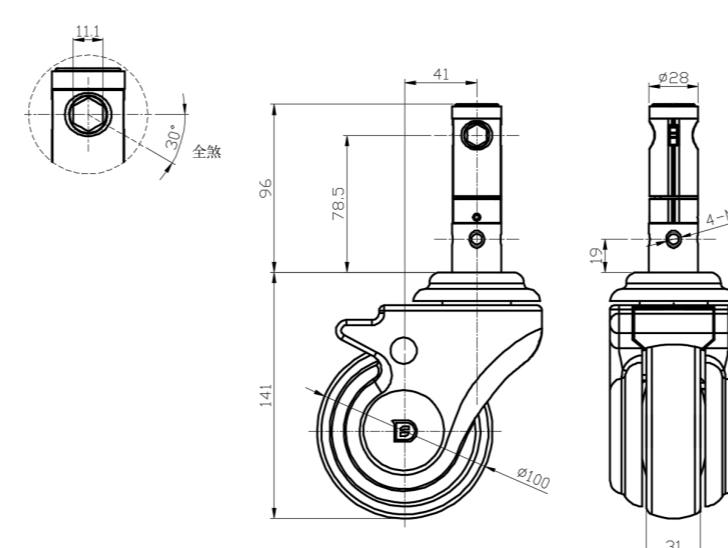

Mounting

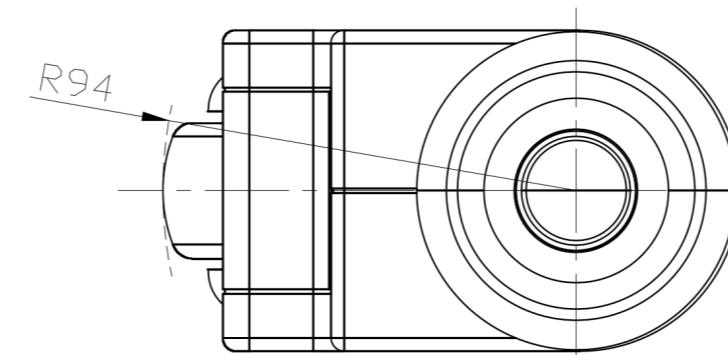

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com