# 1138 38 Series Central Locking Caster Series



Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 100 x 31mm

EAN

#### YJ-11380400458040

Short Stem Central Locking, Total Brake castor. Single Bolthole punching Press Fork Surface Zine-Plated, Mounting Type - Single Bolthole Impact resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl grey, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Diameter 1-5/16 "

Stem Hole Spec 2 "

Offset 1-5/8 "

Swivel Interference 7-1/2 "

Overall Height 5-9/16 "
Swivel Radius 3-3/4 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 154lbs

Load Capacity (Static) 231lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.1lbs


Standard ISO22881

## Advantages at a glance


Rolling Resistance

Floor Surface Preservation • • • • •

### Dimensions

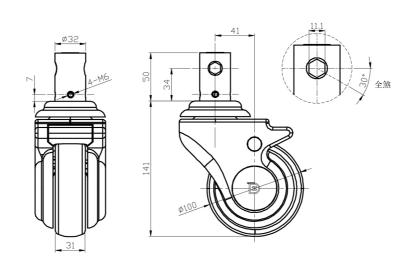

Mounting

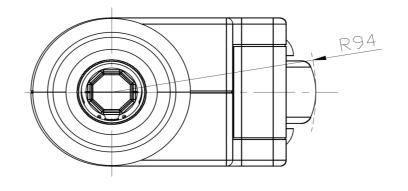

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.