1138 38 Series Central Locking Caster Series



Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 125 x 31mm

EAN

YJ-11380500458040

Casters with a long lever, Hexagonal hole, Cam center lock, full locking, or fixed system. Single Bolthole-rivet Stamping Fork.

Zine-Plated, Mounting Type - Single Bolthole.
High-Quality Impact-Resistant Polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Pearl-finish dark gray. Bearings: Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

5" Wheel Diameter 1-1/4 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

1-1/8 " Diameter Stem Hole Spec 3-7/8 " 1-7/16 " Offset 7-13/16 " Swivel Interference Overall Height 6-1/2 " 3-15/16 " **Swivel Radius** Hardness Of Tread 72±5° Shore A

324lbs Load Capacity (Dynamic) 486lbs Load Capacity (Static) Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

ISO22883

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 3.0lbs

Standard


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

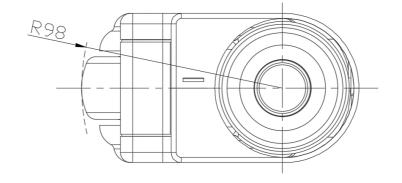

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.