## 1138 38 Series Central Locking Caster Series



Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 125 x 31mm

EAN

YJ-11380500458070

Long Stem Central Locking, Total Brake or neutral castor. Single Bolthole Studded Riveted foot Surface Zine-Plated, Mounting Type - Single Bolthole Impact resistant High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl grey, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data

Fork Type

Standard

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Diameter 28mm

Stem Hole Spec 96mm

Offset 35.5mm

Swivel Interference 196mm

Overall Height 165mm

Swivel Radius 98mm

Hardness Of Tread 82±5° Shore A
Load Capacity (Dynamic) 147kgs
Load Capacity (Static) 220.5kgs

Temperature -20°C to +60°C

Swivel Caster With Total Brake

ISO22881

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight1.28kgs

## Advantages at a glance

Rolling Resistance


 $\bullet$   $\bullet$   $\circ$ 

Operating Noise


• • • • 0

Floor Surface Preservation • • • • •

## Dimensions

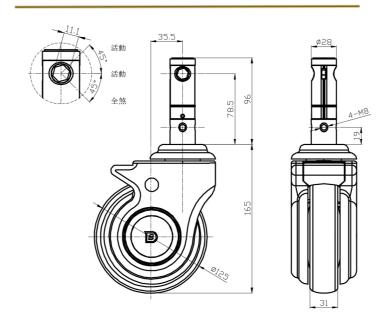

Mounting

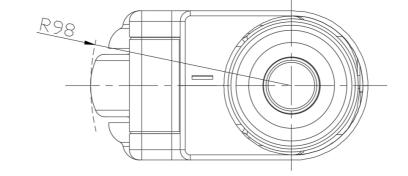

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.