

1139 Medium Duty General Purposes Caster Series



Rubber Wheel Diameter × Wheel Width 75 x 30mm


EAN

YJ-11390300061013

Rigid castors, Stamping Fabricated Caster Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacings Extended control lever surface, Top Plate installation Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Wheels—Plain Bearing

Wheel Tread: high quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

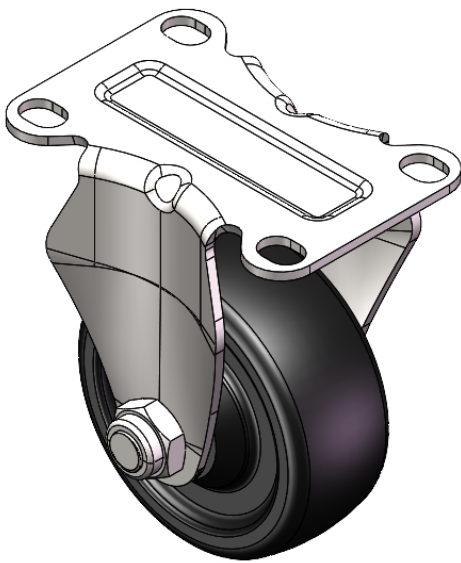

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	75mm
Wheel Width	30mm
Wheel Bearing	Wheel With Plain Bearing
Angle Bar Plate Size	92 x 62mm
Angle Bar Plate Specification	75 x 45mm
Angle Bar Plate Hole	12 x 9mm
Overall Height	105.5mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	70kgs
Load Capacity (Static)	105kgs
Temperature	-20°C to +120°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.6kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ● ○

Dimensions

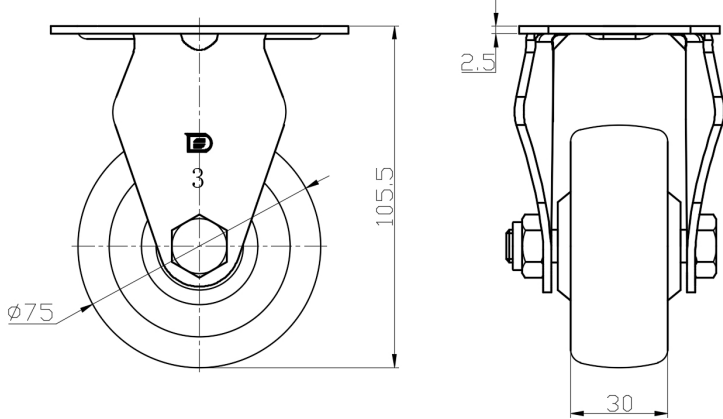

Mounting

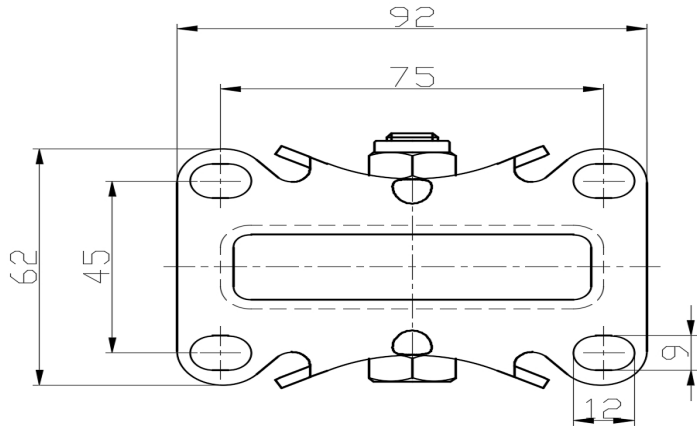

* For any deviation between metric and imperial spec, please refer to the metric spec.