



1139 Medium Duty General Purposes Caster Series

Rubber Wheel Diameter × Wheel Width 75 x 30mm


EAN

YJ-11390300062013

Swivel Caster, Top Plate Riveted and Stamping with 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing  
Zine-Plated, Top Plate (4T) Mounting Type  
Reinforced Polypropylene core, High-Quality Resilient Rubber Wheel Tread  
Bearing - Plain Bearing

Wheel surface: high-quality elastic rubber  
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

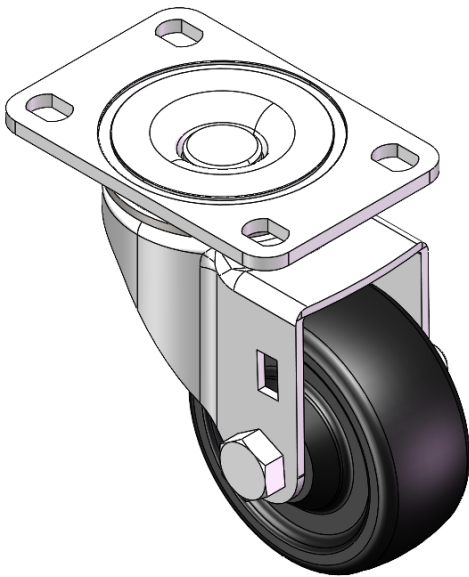

Picture may differ from original product


Technical Data

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                          |
| Wheel Diameter                                                         | 3 "                      |
| Wheel Width                                                            | 1-3/16 "                 |
| Wheel Bearing                                                          | Wheel With Plain Bearing |
| Plate Size                                                             | 3-13/16 " x 2-9/16 "     |
| Bolt Hole Spacing                                                      | 3 " x 1-13/16 "          |
| Plate Hole                                                             | 1/2 " x 23/64 "          |
| Offset                                                                 | 1-1/2 "                  |
| Swivel Interference                                                    | 6 "                      |
| Overall Height                                                         | 4-3/16 "                 |
| Swivel Radius                                                          | 3-1/2 "                  |
| Hardness Of Tread                                                      | 80±5° Shore A            |
| Load Capacity (Dynamic)                                                | 154lbs                   |
| Load Capacity (Static)                                                 | 231lbs                   |
| Temperature                                                            | -4°F to +248°F           |
| Fork Type                                                              | Swivel Caster            |
| Stainless                                                              | N/A                      |
| Electrical Conductivity                                                | N/A                      |
| Anti-Static                                                            | N/A                      |
| Weight                                                                 | 1.6lbs                   |
| Standard                                                               | ISO22883                 |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

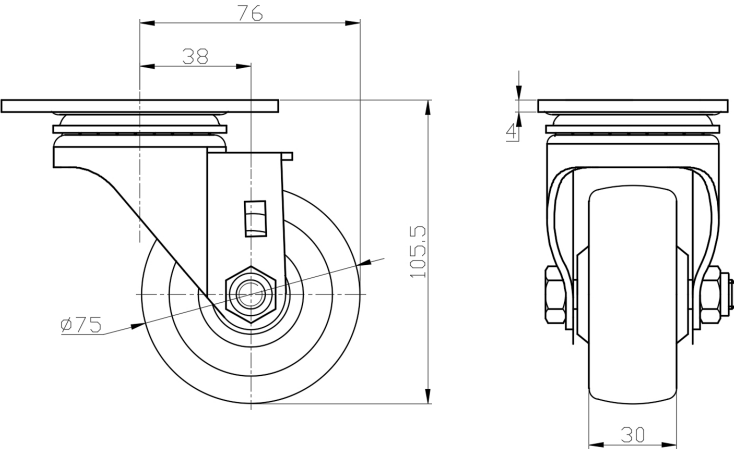

Mounting

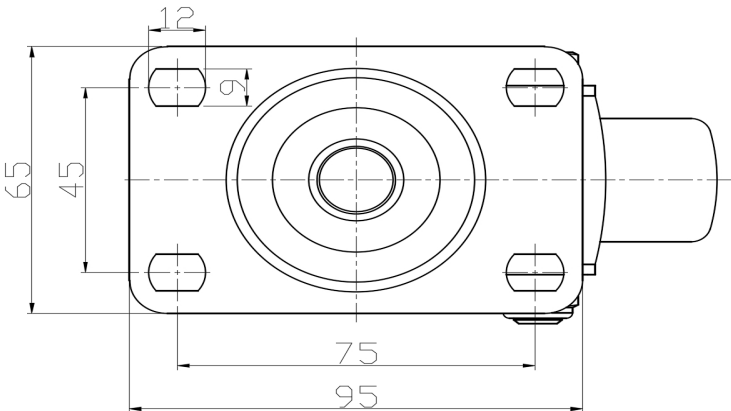

\* For any deviation between metric and imperial spec, please refer to the metric spec.