


Rubber Wheel Diameter x Wheel Width 75 x 30mm

EAN

YJ-11390300064023

Casters with Total Brakes and With locking system. Premium Fork with Riveted Fork. Hole Zinc-Plated, Top Plateed (4T) Mounting Type system. Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread. Bearing - Plain Bearing

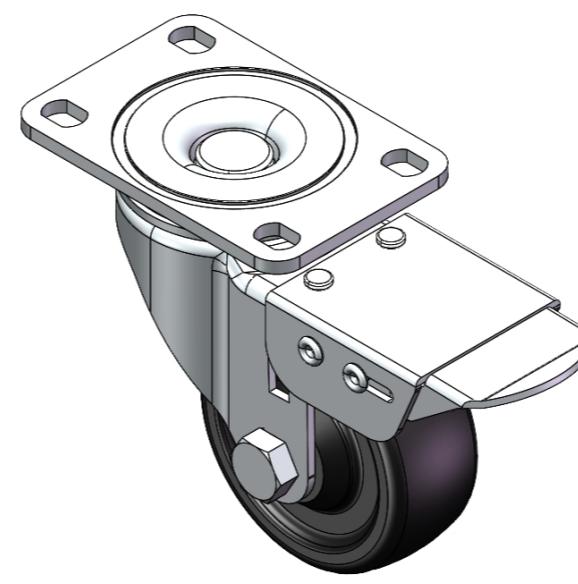

Wheel tread: high-quality elastic rubber
Wheel Center: Thermoplastic plastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter 75mm

Wheel Width 30mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 95 x 65mm

Bolt Hole Spacing
YJ2025021504.php on line 1410

Notice: Undefined variable: mb033a in C:\xampp\htdocs\derweb\der-1139-EN-

Notice: Undefined variable: mb033a in

Plate Hole

C:\xampp\htdocs\derweb\der-1139-EN-

YJ2025021504.php on line 1450

Overall Height

Hardness Of Tread

° Shore A

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

Standard


Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

Dimensions

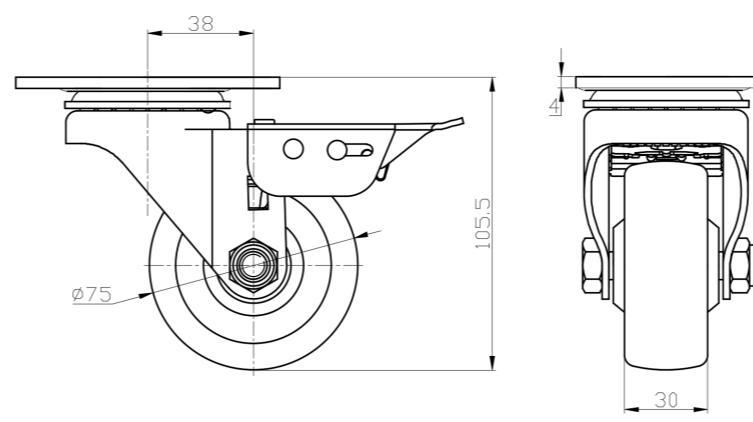

Mounting

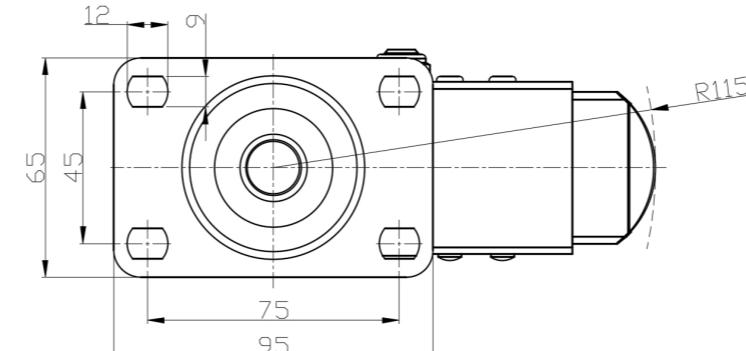

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com

Warning: A non-numeric value encountered in C:\xampp\htdocs\derweb\der-1139-EN-YJ2025021504.php on line 2995

Warning: A non-numeric value encountered in C:\xampp\htdocs\derweb\der-1139-EN-YJ2025021504.php on line 2995