# 1139 Medium Duty General Purposes Caster Series

Rubber Wheel Diameter × Wheel Width 75 x 30mm


EAN

YJ-11390300065013

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75
Zine-Plated, Mounting Type - Threaded Stem
Reinforced Polypropylene core, High-Quality Resilient Rubber Wheel Tread Bearing –Central tube

Wheel surface: high-quality elastic rubber Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

3 " Wheel Diameter

1-3/16 " Wheel Width

Wheel With Plain Bearing Wheel Bearing

**Threaded Stem** M12-P1.75 1 " Threaded Size Offset 1-1/2 " 6" Swivel Interference Overall Height 4-3/16 "

3 " **Swivel Radius** Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 154lbs 231lbs Load Capacity (Static)

Temperature -4°F to +248°F Fork Type **Swivel Caster** 

N/A Stainless **Electrical Conductivity** N/A Anti-Static N/A 1.3lbs Weight Standard ISO22883


## Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

#### **Dimensions**



Mounting

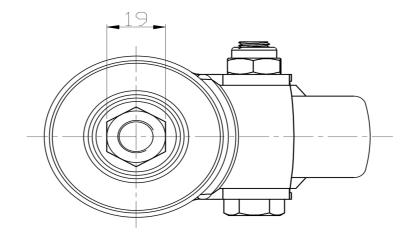

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.