



1139 Medium Duty General Purposes Caster Series

WMRC (Transparent) Wheel Diameter × Wheel Width 75 x 31mm


EAN

YJ-11390300072013

Swivel Caster with Riveted Fork and Stamping Fork—75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing  
Zine-Plated, Top Plate (4T) Mounting Type system  
Reinforced thermoplastic Wheel Center and Wheel Tread  
Bearing—Ball Bearing.

Wheel tread: Thermoplastic (PA6)  
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

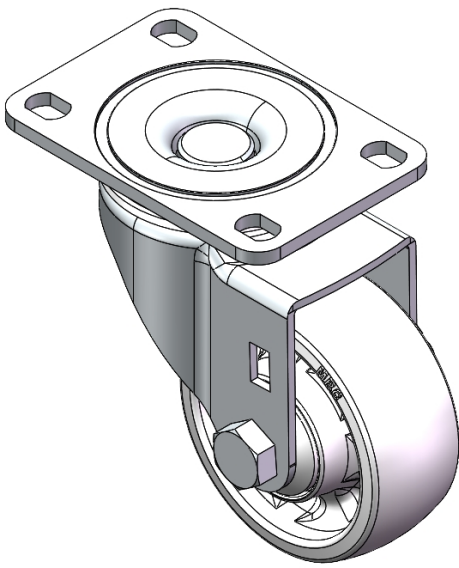

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 3 "                       |
| Wheel Width                                                            | 1-1/4 "                   |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 3-13/16 " x 2-9/16 "      |
| Bolt Hole Spacing                                                      | 3 " x 1-13/16 "           |
| Plate Hole                                                             | 1/2 " x 23/64 "           |
| Offset                                                                 | 1-1/2 "                   |
| Swivel Interference                                                    | 6 "                       |
| Overall Height                                                         | 4-3/16 "                  |
| Swivel Radius                                                          | 3 "                       |
| Hardness Of Tread                                                      | 75±5° Shore D             |
| Load Capacity (Dynamic)                                                | 353lbs                    |
| Load Capacity (Static)                                                 | 529lbs                    |
| Temperature                                                            | -4°F to +176°F            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 1.5lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ○ ○ ○ |
| Floor Surface Preservation | ● ● ○ ○ ○ |

Dimensions

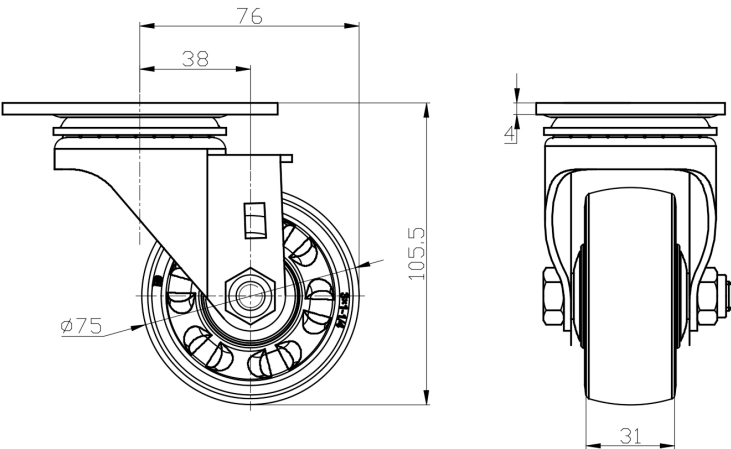

Mounting

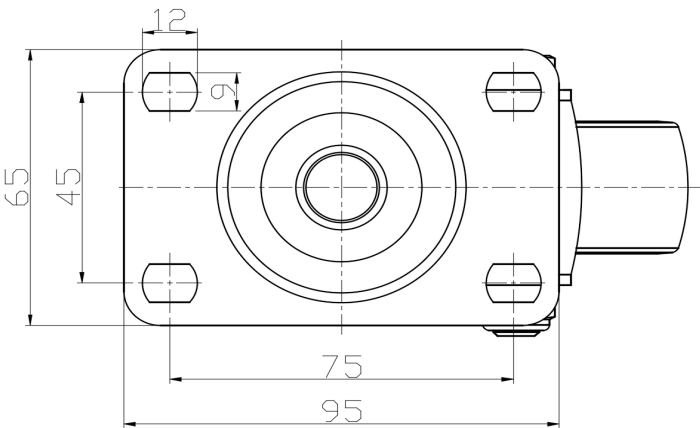

\* For any deviation between metric and imperial spec, please refer to the metric spec.