1139-1 Series — Medium Duty General Purposes Caster (American Style)

Dersheng Casters Keep Rolling

Nylon Wheel (Natural Color) Wheel Diameter × Width 75 × 32 mm


EAN

YJ-11390300074913

Casters with Total Brakes and With locking system. Top Plate Riveted and Stamping with 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.
Zine-Plated, Mounting Type - Top Plate.
Reinforced Polypropylene Wheel Center and Wheel Tread.
Bearings—Ball Bearings.

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 32mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 93 x 61mm

Bolt Hole Spacing 73.5 x 45mm

Plate Hole 12.9 x 9.5mm

Offset 30mm

Swivel Interference 213mm

Overall Height 106mm

Swivel Radius 106.5mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 100kgs
Load Capacity (Static) 150kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.68kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


••••

Operating Noise


• • 0 0 0

Floor Surface Preservation • • ○ ○ ○

Dimensions





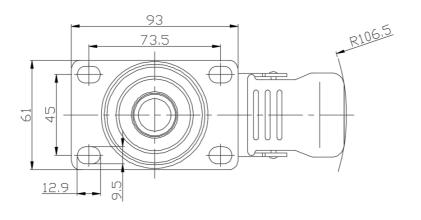

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.