1139-1 Series — Medium Duty General Purposes Caster (American Style)

Dersheng Casters Keep Rolling

Nylon Wheel (Natural Color) Wheel Diameter × Width 75 × 32 mm


EAN

YJ-11390300074913

Casters with Total Brakes and With locking system. Top Plate Riveted and Stamping with 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.
Zine-Plated, Mounting Type - Top Plate.
Reinforced Polypropylene Wheel Center and Wheel Tread. Bearings—Ball Bearings.

Wheel tread: Thermoplastic (PA6) Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Swivel Radius

3 " Wheel Diameter

6-11/32 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

3-11/16 " x 2-7/16 " Plate Size

2-15/16 " x 1-13/16 " **Bolt Hole Spacing**

9/16 " x 3/8 " Plate Hole

Offset 1-3/16 "

8-1/2 " Swivel Interference

4-1/4 " Overall Height 4-1/4 "

75±5° Shore D Hardness Of Tread

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster With Total Brake

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.5lbs Standard ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

 \bullet \bullet \circ \circ


Floor Surface Preservation • • • • • •

Dimensions





Mounting

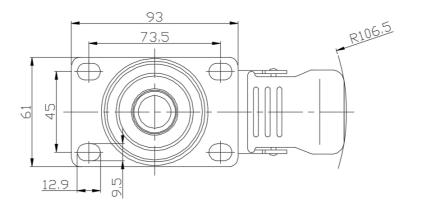

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.