## 1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

WMRC (Black) Wheel Diameter × Wheel Width 75 x 31mm

EAN


YJ-11390300075013

Swivel Caster with Riveted Stamping Fork—3/8"-16" Zine-Plated, Mounting Type - Threaded Stem Reinforced thermoplastic core and Wheel Tread Black, Ball Bearings.

Wheel tread: Thermoplastic (PA6)

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

## **Technical Data**

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 3/8"-16

Threaded Size 25mm

Offset 38mm

Swivel Interference 152mm

Overall Height 105.5mm

Swivel Radius 76mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 160kgs

Load Capacity (Static) 240kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

0.52kgs

Standard

ISO22883

## Advantages at a glance


Rolling Resistance

**Operating Noise** 


El 0 ( D (

Floor Surface Preservation  $\bullet \bullet \circ \circ \circ$ 

## Dimensions

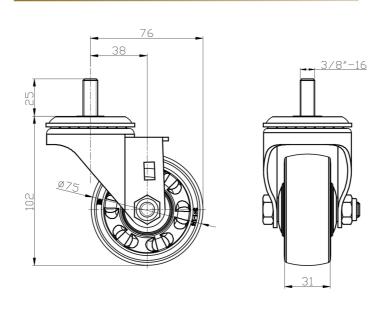

Mounting

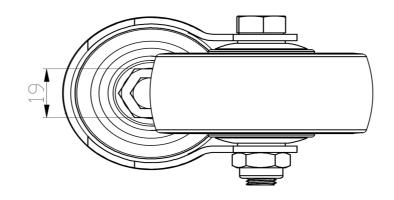

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.