1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

WMRC (Black) Wheel Diameter × Wheel Width 75 x 31mm

EAN

YJ-11390300076013

Casters with Total Brakes and With locking system. Threaded Stem Riveted Pressed Fork


--3/8"-16"

Zine-Plated, Mounting Type - Threaded Stem Reinforced thermoplastic Wheel Center and Wheel Tread

Black, Bearing—Ball Bearings.

Wheel tread: Thermoplastic (PA6) Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Load Capacity (Static)

Wheel Diameter 75mm Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 3/8"-16 Threaded Size 25mm Offset 38mm **Swivel Interference** 230mm 105.5mm Overall Height **Swivel Radius** 115mm

Hardness Of Tread 75±5° Shore D Load Capacity (Dynamic) 160kgs

-20°C to +80°C Temperature

Fork Type Swivel Caster With Total Brake

240kgs

N/A Stainless **Electrical Conductivity** N/A Anti-Static N/A Weight 0.67kgs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • • •

Dimensions

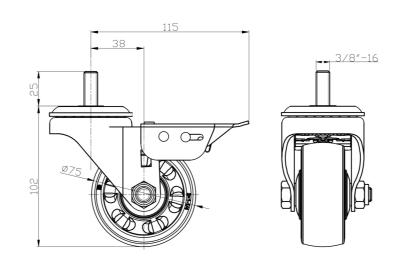

Mounting

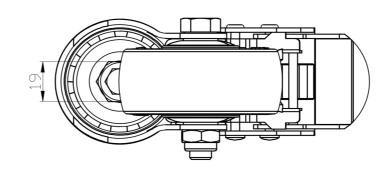

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.