## 1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

WMRC (Black) Wheel Diameter × Wheel Width 75 x 31mm

EAN

YJ-11390300076013

Casters with Total Brakes and With locking system. Threaded Stem Riveted Pressed Fork


--3/8"-16"

Zine-Plated, Mounting Type - Threaded Stem Reinforced thermoplastic Wheel Center and Wheel Tread

Black, Bearing—Ball Bearings.

Wheel tread: Thermoplastic (PA6) Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

## **Technical Data**

● Imperial ○ Metric

Hardness Of Tread

3 " Wheel Diameter

1-1/4 " Wheel Width

Wheels With Ball Bearings Wheel Bearing

**Threaded Stem** 3/8"-16 1 " Threaded Size Offset 1-1/2 " 9-1/8 " **Swivel Interference** 4-3/16 " Overall Height

4-9/16 " **Swivel Radius** 

Load Capacity (Dynamic) 353lbs 529lbs Load Capacity (Static)

Temperature -4°F to +176°F

Swivel Caster With Total Brake Fork Type

75±5° Shore D

N/A Stainless **Electrical Conductivity** N/A Anti-Static N/A Weight 1.5lbs Standard ISO22883


## Advantages at a glance

Rolling Resistance


**Operating Noise** 

Floor Surface Preservation • • • • • •

## **Dimensions**

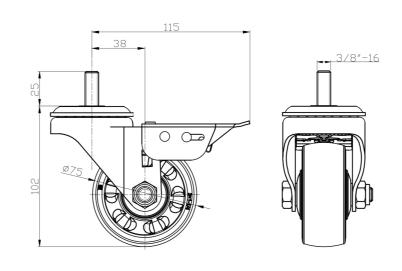

Mounting

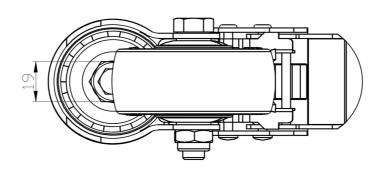

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.