


1139 Medium Duty General Purposes Caster Series

PPR E-Conductive (black-gray) Wheel Diameter x Wheel Width 75 x 31mm

EAN

YJ-11390300172013

Swivel castor, Top Plate Riveted Stamping Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing Surface Zinc-Plated, Top Plate (4T) Mounting Type device High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Black-grey, Bearing - Ball Bearing.

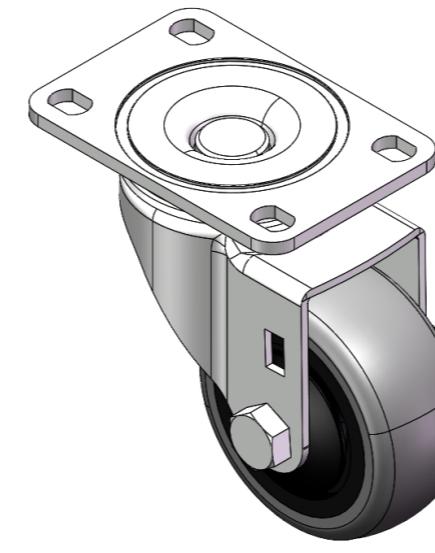

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	75mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	95 x 65mm
Bolt Hole Spacing	75 x 45mm
Plate Hole	12 x 9mm
Offset	38mm
Swivel Interference	152mm
Overall Height	105.5mm
Swivel Radius	76mm
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	135kgs
Load Capacity (Static)	90kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	Y 导电值 $10^3 \sim 10^4$
Anti-Static	N/A
Weight	0.68kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • • ○
Operating Noise	• • • • ○
Floor Surface Preservation	• • • • ○

Dimensions

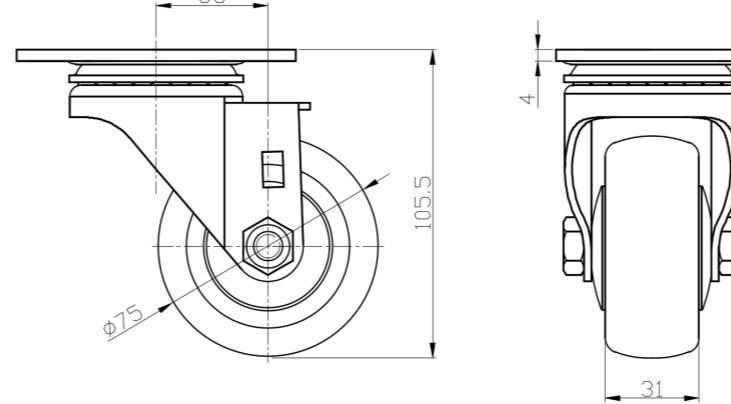

Mounting

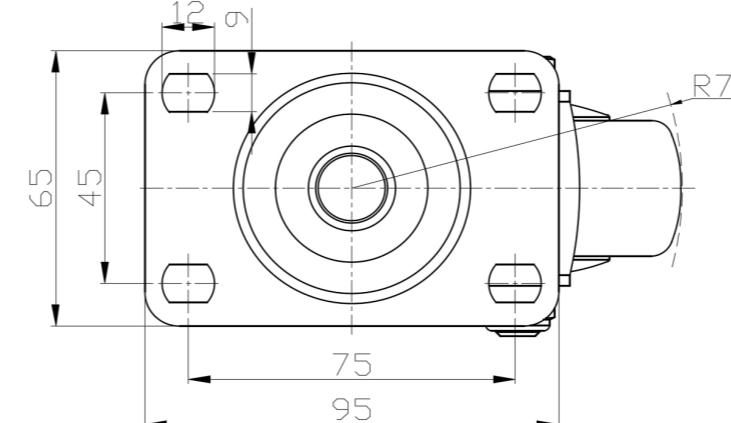

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com