1139-1 Series — Medium Duty General Purposes Caster (American Style)

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 31mm


EAN

YJ-11390300261923

Rigid Caster with Stamping Fabricated Caster Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate.
Polypropylene Wheel Center and Wheel Tread. Pearl-gray finish. Bearings: Ball Bearings.

Tread:Polypropylene Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Standard

● Metric ○ Imperial

Wheel Diameter 75mm

Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

106mm

ISO22883

Plate Size 94 x 63mm **Bolt Hole Spacing** 74 x 45mm Plate Hole 12.3 x 9mm Overall Height

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 100kgs Load Capacity (Static) 150kgs

-20°C to +60°C Temperature

Fork Type Rigid Caster Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.37kgs


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

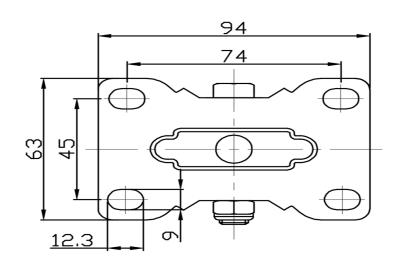

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.