1139-1 Series — Medium Duty General Purposes Caster (American Style)

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 31mm

EAN

YJ-11390300261923

Rigid Caster with Stamping Fabricated Caster Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.


Zine-Plated, Mounting Type - Top Plate.

Polypropylene Wheel Center and Wheel Tread.

Pearl-gray finish. Bearings: Ball Bearings.

Tread:Polypropylene
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 3-3/4 " x 2-1/2 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 1/2 " x 23/64 "

Overall Height 4-1/4 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature -4°F to +140°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.8lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \bullet \circ


Operating Noise

• • • • 0


Floor Surface Preservation $\bullet \bullet \bullet \bullet \bullet$

Dimensions





Mounting

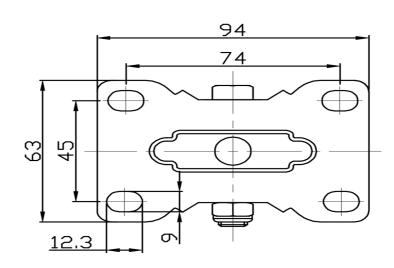

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.