1139 Medium Duty General Purposes Caster Series



PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 31mm

EAN

YJ-11390300266923

Casters with Side Brakes and With locking system. Threaded Stem Riveted Pressed Fork **- 1/2"-13"**


Zine-Plated, expansion joints (Ø 18.5-Ø 21.5)
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Pearl-gray finish, Bearing – Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

3 " Wheel Diameter 1-1/4 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

3/4 " x 2-3/4 " Expandable Stem

Offset 1-1/2 " 6-3/8 " Swivel Interference 4-1/16" Overall Height **Swivel Radius** 3-3/16 " Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 198lbs Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Side Brake

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.7lbs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

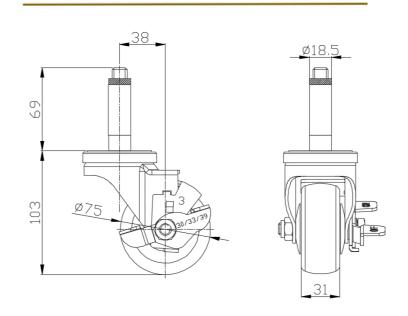

Mounting

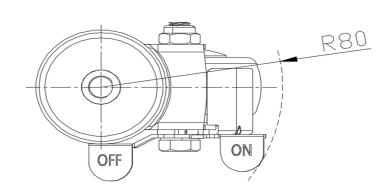

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.