1139 Medium Duty General Purposes Caster Series



WPP (white) Wheel Diameter × Wheel Width 75 x 31mm


EAN

YJ-11390300291013

Rigid castors, Stamping Fabricated Caster Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacings Extended control lever surface, Top Plate installation Polypropylene Wheel Center, Wheel Tread White, Bearing - Ball Bearings.

Wheel Tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 92 x 65mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 12 x 9mm

Overall Height 105.5mm

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 100kgs

Load Capacity (Static) 150kgs

Load Capacity (Static)

Temperature

-10°C to +60°C

Fork Type

Rigid Caster

Stainless

N/A

Electrical Conductivity

Anti-Static

N/A

Weight

0.37kgs

Standard

ISO22883

Advantages at a glance

Rolling Resistance


• • • •


Operating Noise

• • 0 0


Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions





Mounting

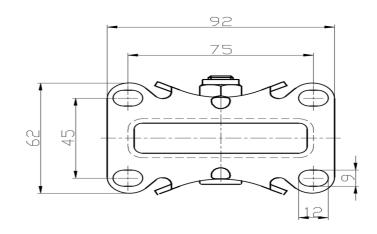

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.