1139 Medium Duty General Purposes Caster Series



WPP (white) Wheel Diameter × Wheel Width 75 x 31mm


EAN

YJ-11390300292013

Swivel Casters, Top Plate Riveted Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacings Extended control lever surface, Top Plate (4T) installation device Polypropylene Wheel Center, Wheel Tread White, Bearing - Ball Bearings.

Wheel Tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-1/4 "
Wheel Bearing Wheels With Ball Bearings

Plate Size 3-13/16 " x 2-9/16 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 1/2 " x 23/64 "

Offset 1-1/2 "

Swivel Interference 6 "

Swivel Interference 6 "

Overall Height 4-3/16 "

Swivel Radius 3 "

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature 14°F to +140°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.4lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


••••

Operating Noise


 \bullet \bullet \circ \circ

Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions



Mounting

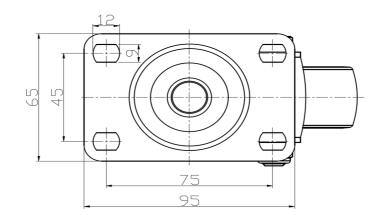

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.