

1139 Medium Duty General Purposes Caster Series



PU (Black flat) Wheel Diameter x Wheel Width 75 × 32mm


EAN

YJ-11390300335023

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75 Extended control lever surface, Mounting Type - Threaded Stem device Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread Black, Bearing—Ball Bearing.

Wheel tread: Made of high quality polyurethane
Wheel Center: cast iron core

Drawings are for reference only and may differ from the product

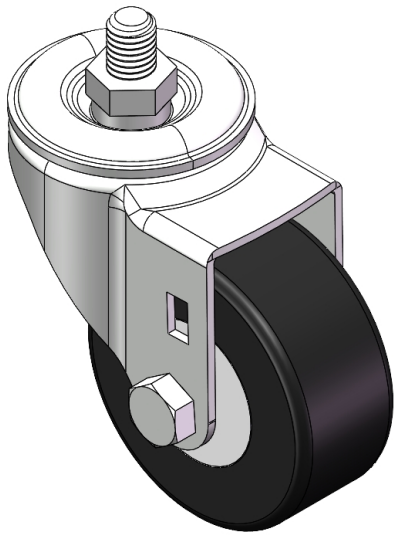

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	75mm
Wheel Width	32mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M12-P1.75
Threaded Size	15mm
Offset	38mm
Swivel Interference	156mm
Overall Height	105.5mm
Swivel Radius	78mm
Hardness Of Tread	93±5° Shore A
Load Capacity (Dynamic)	90kgs
Load Capacity (Static)	135kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.93kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

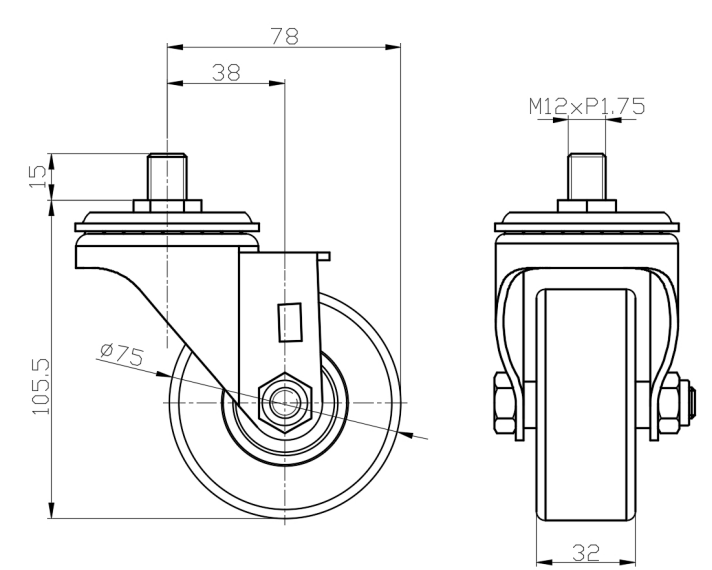

Mounting

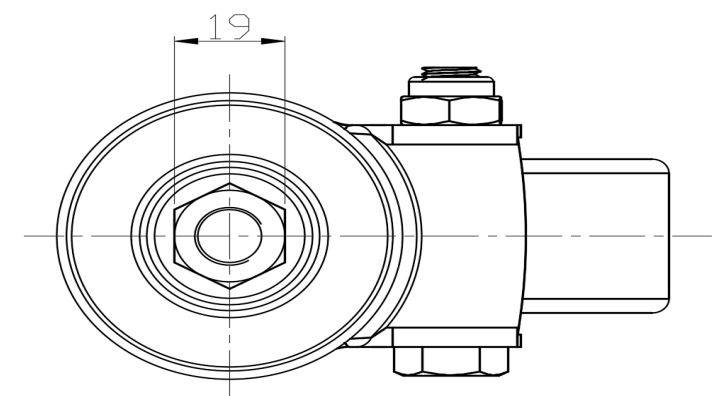

* For any deviation between metric and imperial spec, please refer to the metric spec.